

BOUNDARY GARD™

External detection technology without boundaries

No mains required - Battery powered self contained

Void Property Protection

Construction Site Protection

Plant Security

Internal/External battery powered wireless sensing and Gsm communication system.

- 12-24m small animal immune external sensors
- 12-20m wide angle internal sensor/16-45m corridor pattern sensor
- 12m 360° indoor sensor
- 30-60m Active IR battery powered beams (3-5 Year battery life)
- Tilt switch, and other devices are also available.

External sensors



VX402R Animal immunity 12m wide angle rotating detection area control







HX402RAM Animal immunity 12m, A¹masking provision 3m mounting height



BX80NR Animal immunity 24m range. Ideal for protecting building perimeters

Basic Internal sensors

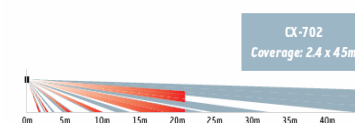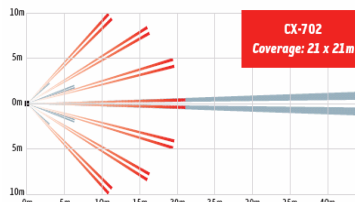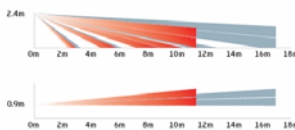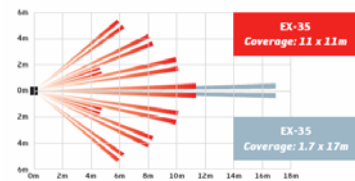

Active Beams



Main features

Completely wireless system, Easily portable Control system, Wireless key arming, handles 8-24* devices, No engineers required, GSM alert system programmed in situ or remotely, Will signal up to 10 telephone numbers via text or signal ARC*, Control system is self contained and can be hidden anywhere. Messages include — Low battery warning , Arm/Disarm, Device ID, Site ID, Tamper, Automatic daily system status report sending function.

* Feature in development